


NLS LIGHTING

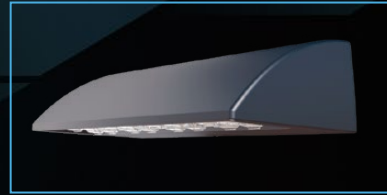

Products Reference Guide

nslighting.com

NLS Lighting spares no expense in engineering high performance architectural outdoor lighting fixtures directed toward architects and specifiers. Superior optics matched with a wide array of elegant luminaires, poles, and bases. Our products are designed, engineered, manufactured, and assembled in the USA. Made with the strictest standard. We pride ourselves on quality and our American workforce. NLS Headquarters is located in Southern California. USA made products provide more American jobs, greater product ingenuity, higher quality products, and faster leadtimes.

We are USA Strong!

AREA/SITE - CONTEMPORARY




ORX-2-AM Lumens: 1,690 – 21,669 Wattage: 21 – 200
 ORX-3-AM Lumens: 7,392 – 48,844 Wattage: 88 – 452
 ORX-2-SPT Lumens: 1,675 – 21,053 Wattage: 20 – 200
 ORX-2-DPT Lumens: 1,636 – 21,129 Wattage: 20 – 200
 ORX-3-SPT Lumens: 6,933 – 46,133 Wattage: 84 – 430
 ORX-3-DPT Lumens: 6,597 – 45,848 Wattage: 84 – 430



NV-1 Lumens: 1,336 – 26,650 Wattage: 21 – 207
 NV-2 Lumens: 11,692 – 56,092 Wattage: 168 – 467
 NV-3 Lumens: 38,011 – 103,699 Wattage: 420 – 799
 NV-1-ASA Lumens: 1,336 – 26,650 Wattage: 21 – 2070
 NV-2-ASA Lumens: 11,692 – 56,092 Wattage: 168 – 467
 NV-3-ASA Lumens: 38,011 – 103,699 Wattage: 420 – 799



VUE-12X SPORTS Lumens: 25,818 – 53,687 Wattage: 256 – 426
 VUE-34X SPORTS Lumens: 47,349 – 87,361 Wattage: 414 – 706
 VSR-S Lumens: 2,085 – 12,296 Wattage: 21 – 106
 VSR-S-YM Lumens: 2,085 – 12,296 Wattage: 21 – 106
 VSR-1 Lumens: 7,427 – 23,785 Wattage: 71 – 205
 VSR-1-SPMX Lumens: 7,427 – 23,785 Wattage: 71 – 205

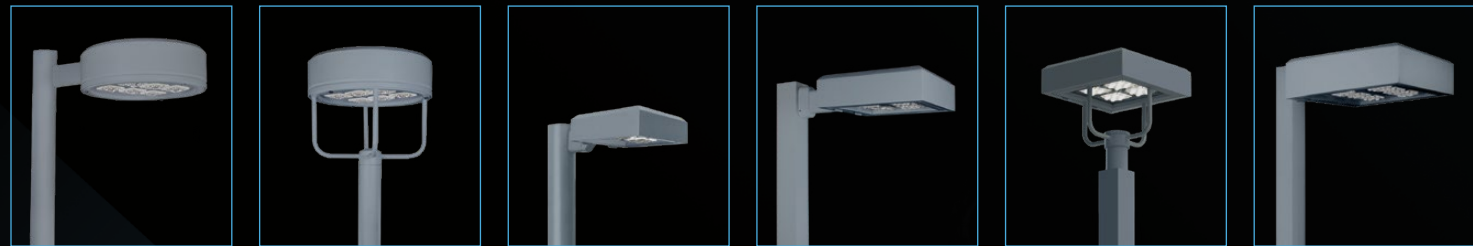

VSR-2 Lumens: 27,510 – 37,604 Wattage: 263 – 316
 VSR-2-SPMX Lumens: 27,510 – 37,604 Wattage: 263 – 316
 VSS-S Lumens: 2,077 – 12,508 Wattage: 21 – 106
 VSS-1 Lumens: 7,427 – 24,600 Wattage: 71 – 205
 VSS-1-SPMX Lumens: 7,427 – 24,600 Wattage: 71 – 205
 VSS-2 Lumens: 27,510 – 37,604 Wattage: 263 – 316



VSS-2-SPMX Lumens: 27,510 – 37,604 Wattage: 263 – 316
 TRAC-1 Lumens: 2,320 – 6,482 Wattage: 21 – 56
 TRAC-2 Lumens: 4,385 – 12,698 Wattage: 36 – 106
 TRAC-3 Lumens: 4,385 – 18,686 Wattage: 36 – 156
 TRAC-4 Lumens: 4,385 – 24,355 Wattage: 36 – 205
 TRAC-5 Lumens: 4,385 – 24,355 Wattage: 36 – 205

AREA/SITE - DECORATIVE



CAL-S Lumens: 1,748 – 11,872 Wattage: 21 – 106
 CAL-1 Lumens: 7,100 – 22,960 Wattage: 51 – 205
 CAL-2-AM Lumens: 8,500 – 31,034 Wattage: 85 – 263
 NOVA-2 Lumens: 1,797 – 27,801 Wattage: 21 – 247
 NEWPORT Lumens: 1,516 – 6,745 Wattage: 21 – 71
 HORIZON PT Lumens: 2,085 – 26,240 Wattage: 21 – 205



HORIZON MA Lumens: 2,085 – 26,240 Wattage: 21 – 205
 CLASSIC MINI Lumens: 2,085 – 6,496 Wattage: 21 – 56
 CLASSIC 1 Lumens: 2,085 – 9,088 Wattage: 21 – 71
 BELLA VISTA MINI Lumens: 1,500 – 5,992 Wattage: 21 – 56
 BELLA VISTA 1 Lumens: 3,234 – 11,128 Wattage: 33 – 104
 CAMBRIA Lumens: 1,269 – 10,816 Wattage: 21 – 104



WILSHIRE Lumens: 1,731 – 8,640 Wattage: 21 – 80
 SAVANNAH Lumens: 3,772 – 10,957 Wattage: 38 – 94
 SVN-RK Lumens: 3,772 – 10,957 Wattage: 38 – 94
 CAB-PT Lumens: 1,814 – 6,608 Wattage: 21 – 56
 CAB-AM Lumens: 1,814 – 6,608 Wattage: 21 – 56
 SENTRY Lumens: 1,583 – 3,636 Wattage: 21 – 36



SENTRY 2 Lumens: 4,806 – 10,504 Wattage: 54 – 104
 LEGACY Lumens: 1,896 – 12,272 Wattage: 21 – 104
 DEL MAR Lumens: 1,690 – 10,924 Wattage: 21 – 10

ARCHITECTURAL - DECORATIVE



CAL-S
Lumens: 1,748 – 11,872
Wattage: 21 – 106

CAL-1
Lumens: 5,151 – 23,575
Wattage: 51 – 205

CAL-2
Lumens: 8,500 – 31,034
Wattage: 85 – 263

NOVA-2
Lumens: 1,797 – 27,801
Wattage: 21 – 247

NEWPORT
Lumens: 1,516 – 6,745
Wattage: 21 – 71

HORIZON PT
Lumens: 2,085 – 26,240
Wattage: 21 – 205



HORIZON MA
Lumens: 2,085 – 26,240
Wattage: 21 – 205

CLASSIC MINI
Lumens: 2,085 – 6,496
Wattage: 21 – 56

CLASSIC 1
Lumens: 2,085 – 9,088
Wattage: 21 – 71

BELLA VISTA MINI
Lumens: 1,500 – 5,992
Wattage: 21 – 56

BELLA VISTA 1
Lumens: 3,234 – 11,128
Wattage: 33 – 104

CAMBRIA
Lumens: 1,269 – 10,816
Wattage: 21 – 104



WILSHIRE
Lumens: 1,731 – 8,640
Wattage: 21 – 80

SAVANNAH
Lumens: 3,772 – 10,957
Wattage: 38 – 94

SVN-RK
Lumens: 3,772 – 10,957
Wattage: 38 – 94

CAB-PT
Lumens: 1,814 – 6,608
Wattage: 21 – 56

CAB-AM
Lumens: 1,814 – 6,608
Wattage: 21 – 56

SENTRY
Lumens: 1,583 – 3,636
Wattage: 21 – 36



SENTRY 2
Lumens: 4,806 – 10,504
Wattage: 54 – 104

LEGACY
Lumens: 1,896 – 12,272
Wattage: 21 – 104

DEL MAR
Lumens: 1,690 – 10,924
Wattage: 21 – 10

VSR-S-YM
Lumens: 2,085 – 12,296
Wattage: 21 – 106

ARCHITECTURAL - CONTEMPORARY



ORX-2-SPT
Lumens: 1,675 – 21,053
Wattage: 20 – 200

ORX-2-DPT
Lumens: 1,636 – 21,129
Wattage: 20 – 200

ORX-3-SPT
Lumens: 6,933 – 46,133
Wattage: 84 – 430

ORX-3-DPT
Lumens: 6,597 – 45,848
Wattage: 84 – 430

TRAC-1
Lumens: 2,320 – 6,482
Wattage: 21 – 56

TRAC-2
Lumens: 4,385 – 12,698
Wattage: 36 – 106



TRAC-3
Lumens: 4,385 – 18,686
Wattage: 36 – 156

TRAC-4
Lumens: 4,385 – 24,355
Wattage: 36 – 205

TRAC-5
Lumens: 4,385 – 24,355
Wattage: 36 – 205

VSR-1-SPMX
Lumens: 7,427 – 23,785
Wattage: 71 – 205

VSR-2-SPMX
Lumens: 27,510 – 37,604
Wattage: 263 – 316


VSS-1-SPMX
Lumens: 7,427 – 24,600
Wattage: 71 – 205



VSS-2-SPMX
Lumens: 27,510 – 37,604
Wattage: 263 – 316



BOLLARDS - CONTEMPORARY

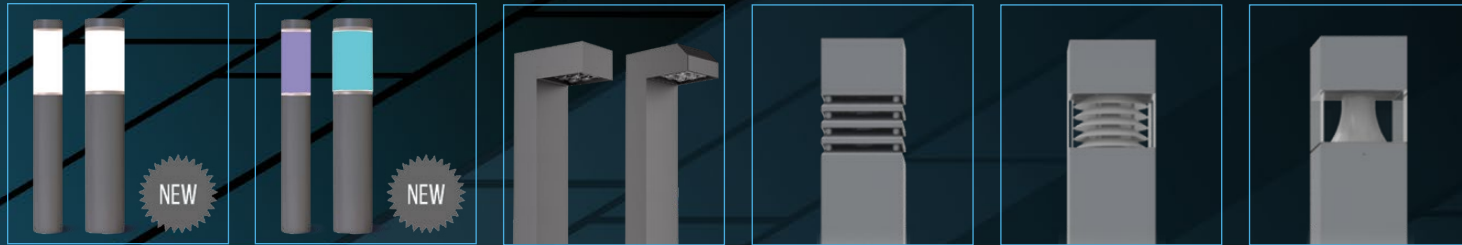

LIRA-6 & LIRA-8 White
Lumens: 2,860 – 3,036
Wattage: 22

LIRA-6 & LIRA-8 RGBW
Lumens: 2,120
Wattage: 34

TBL & TBA
Lumens: 765 – 6,496
Wattage: 10 – 56

SEA SIDE (SQ) FLAT
TOP, COG45
Lumens: 945 – 2,003
Wattage: 17 – 36

SEA SIDE (SQ) FLAT
TOP, STACKED LOUVER
Lumens: 986 – 2,275
Wattage: 17 – 35

SEA SIDE (SQ) FLAT
TOP, PARACLIN
Lumens: 1,309 – 2,975
Wattage: 17 – 35



SEA SIDE (RND) FLAT
TOP, COG45
Lumens: 945 – 2,003
Wattage: 17 – 36

SEA SIDE (RND) FLAT
TOP, STACKED LOUVER
Lumens: 986 – 2,275
Wattage: 17 – 35

SEA SIDE (RND) FLAT
TOP, PARACLIN
Lumens: 1,309 – 2,975
Wattage: 17 – 35

SEA SIDE (RND) DOME
TOP, COG45
Lumens: 945 – 2,003
Wattage: 17 – 36

SEA SIDE (RND) DOME
TOP, STACKED LOUVER
Lumens: 986 – 2,275
Wattage: 17 – 35

SEA SIDE (RND) DOME
TOP, PARACLIN
Lumens: 1,309 – 2,975
Wattage: 17 – 35

BOLLARDS - DECORATIVE




ORGANIX BOLLARD
Lumens: 1,316 – 5,025
Wattage: 21 – 55

CALIFORNIA BOLLARD
Lumens: 918 – 6,608
Wattage: 10 – 56

RADIANT BOLLARD
Lumens: 1,907 – 4,164
Wattage: 21 – 35

WESTFIELD BOLLARD
Lumens: 1,056 – 2,112
Wattage: 21 – 33

BOLLARDS - IMPACT RATED (S10/S20)

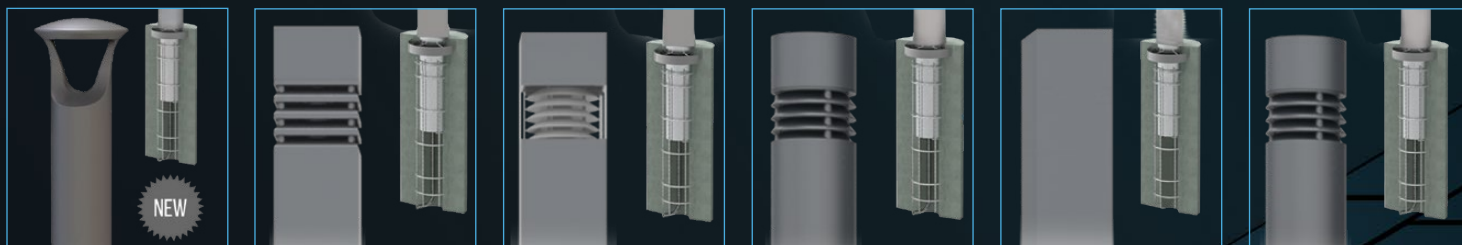

ORGANIX IMPACT
BOLLARD
Lumens: 1,316 – 5,025
Wattage: 21 – 56

SEA SIDE IMPACT
BOLLARD (SQ) FLAT
TOP, COG45
Lumens: 945 – 2,003
Wattage: 17 – 36


SEA SIDE IMPACT
BOLLARD (SQ) FLAT
TOP, STACKED LOUVER
Lumens: 986 – 2,275
Wattage: 17 – 35

SEA SIDE IMPACT
BOLLARD (SQ) FLAT
TOP, PARACLIN
Lumens: 1,309 – 2,975
Wattage: 17 – 35

SEA SIDE IMPACT
BOLLARD (SQ) FLAT
TOP, UNLIT
Lumens: NA
Wattage: NA

SEA SIDE IMPACT
BOLLARD (RND) FLAT
TOP, COG45
Lumens: 945 – 2,003
Wattage: 17 – 36

BOLLARDS - IMPACT RATED (S10/S20) CONTINUED

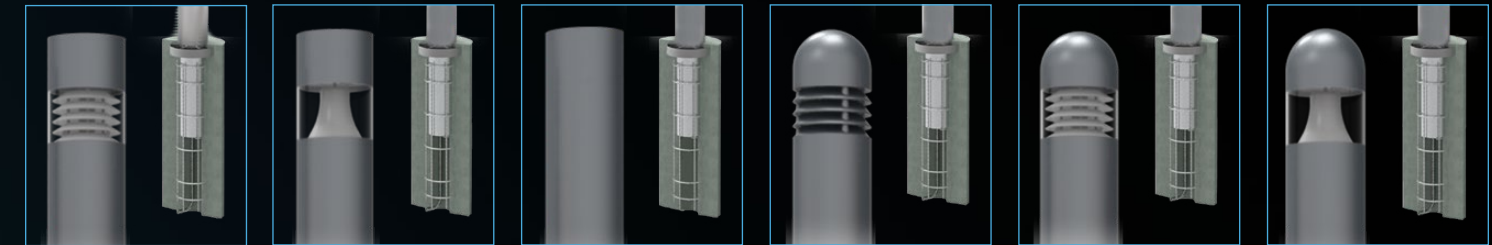

SEA SIDE IMPACT
BOLLARD (RND) FLAT
TOP, STACKED LOUVER
Lumens: 986 – 2,275
Wattage: 17 – 35


SEA SIDE IMPACT
BOLLARD (RND) FLAT
TOP, PARACLIN
Lumens: 1,309 – 2,975
Wattage: 17 – 35

SEA SIDE IMPACT
BOLLARD (RND) FLAT
TOP, UNLIT
Lumens: NA
Wattage: NA

SEA SIDE IMPACT
BOLLARD (RND) DOME
TOP, COG45
Lumens: 945 – 2,003
Wattage: 17 – 36

SEA SIDE IMPACT
BOLLARD (RND) DOME
TOP, STACKED LOUVER
Lumens: 986 – 2,275
Wattage: 17 – 35

SEA SIDE IMPACT
BOLLARD (RND) DOME
TOP, PARACLIN
Lumens: 1,309 – 2,975
Wattage: 17 – 35

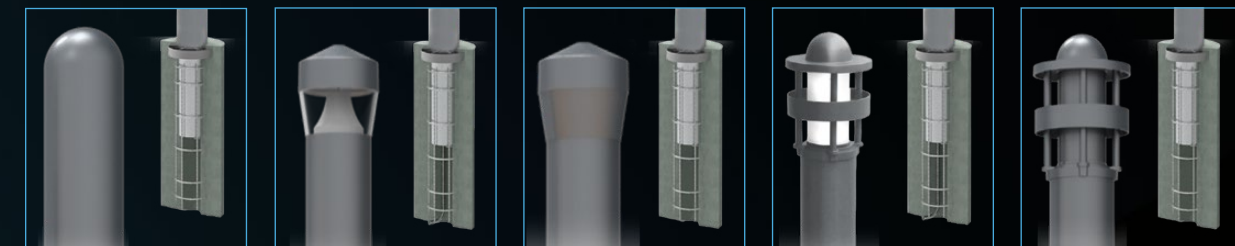

SEA SIDE IMPACT
BOLLARD (RND) DOME
TOP, UNLIT
Lumens: NA
Wattage: NA

RADIANT IMPACT
BOLLARD
Lumens: 1,907 – 4,164
Wattage: 21 – 35

RADIANT IMPACT
BOLLARD, UNLIT
Lumens: NA
Wattage: NA

WESTFIELD IMPACT
BOLLARD
Lumens: 1,056 – 2,112
Wattage: 21 – 33

WESTFIELD IMPACT
BOLLARD, UNLIT
Lumens: NA
Wattage: NA

BOLLARDS - CONCRETE



SEA SIDE CONCRETE
BOLLARD (RND)
CONCRETE DOME TOP
Lumens: 924 – 2,003
Wattage: 21 – 36

SEA SIDE CONCRETE
BOLLARD (RND)
CONCRETE FLAT TOP
Lumens: 924 – 2,003
Wattage: 21 – 36

SEA SIDE CONCRETE
BOLLARD (SQ)
CONCRETE FLAT TOP
Lumens: 924 – 2,003
Wattage: 21 – 36

SEA SIDE CONCRETE
BOLLARD (SQ) CONCRETE
PYRAMID TOP
Lumens: 924 – 2,003
Wattage: 21 – 36


SEA SIDE CONCRETE
BOLLARD (RND) METAL
DOME TOP
Lumens COG45:
924 – 2,003
Lumens SL: 1,012 – 2,275
Lumens PR: 1,308 – 2,975
Wattage: 21 – 36

SEA SIDE CONCRETE
BOLLARD (RND) METAL
FLAT TOP
Lumens COG45:
924 – 2,003
Lumens SL: 1,012 – 2,275
Lumens PR: 1,308 – 2,975
Wattage: 21 – 36




SEA SIDE CONCRETE
BOLLARD (SQ) METAL
FLAT TOP
Lumens COG45:
924 – 2,003
Lumens SL: 1,012 – 2,275
Lumens PR: 1,308 – 2,975
Wattage: 21 – 36

COLUMNS

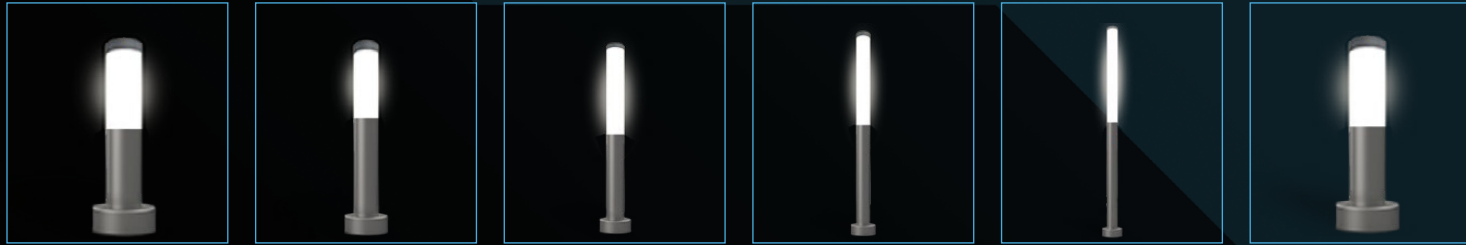


LIRA-6 22W Lumens: 2,860 – 3,036 Wattage: 22
 LIRA-6 44W Lumens: 5,720 – 6,072 Wattage: 44
 LIRA-6 66W Lumens: 8,580 – 9,108 Wattage: 66
 LIRA-6 88W Lumens: 11,568 – 12,144 Wattage: 88
 LIRA-6 110W Lumens: 14,300 – 15,180 Wattage: 110
 LIRA-8 22W Lumens: 2,860 – 3,036 Wattage: 22

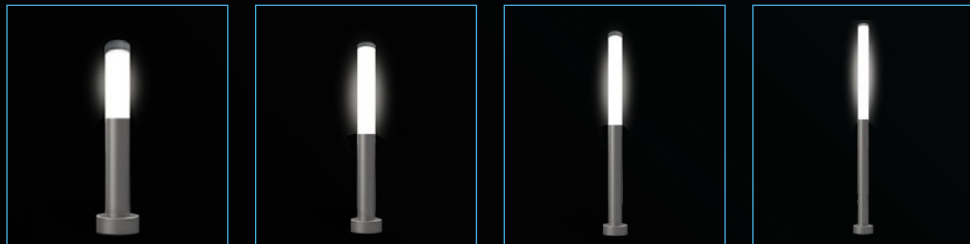


LIRA-8 44W Lumens: 5,720 – 6,072 Wattage: 44
 LIRA-8 66W Lumens: 8,580 – 9,108 Wattage: 66
 LIRA-8 88W Lumens: 11,568 – 12,144 Wattage: 88
 LIRA-8 110W Lumens: 14,300 – 15,180 Wattage: 110

COLUMNS - RGBW

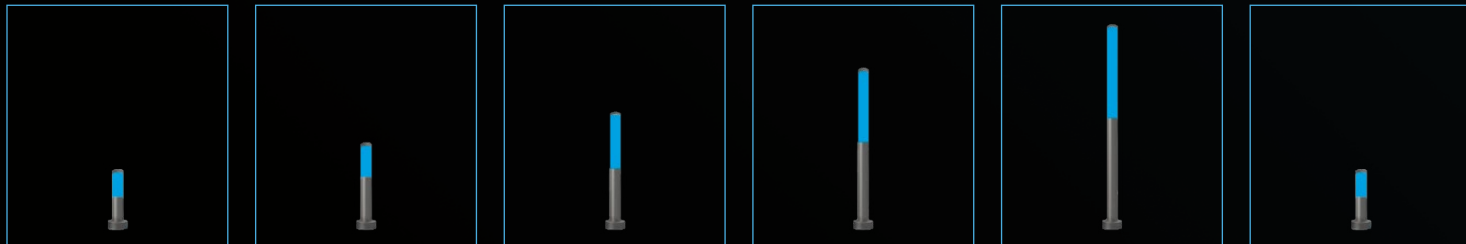

LIRA-6 22W RGBW Lumens: 2,024 Wattage: 22
 LIRA-6 44W RGBW Lumens: 4,048 Wattage: 44
 LIRA-6 66W RGBW Lumens: 6,072 Wattage: 66
 LIRA-6 88W RGBW Lumens: 8,096 Wattage: 88
 LIRA-6 110W RGBW Lumens: 10,120 Wattage: 110
 LIRA-8 22W RGBW Lumens: 2,024 Wattage: 22

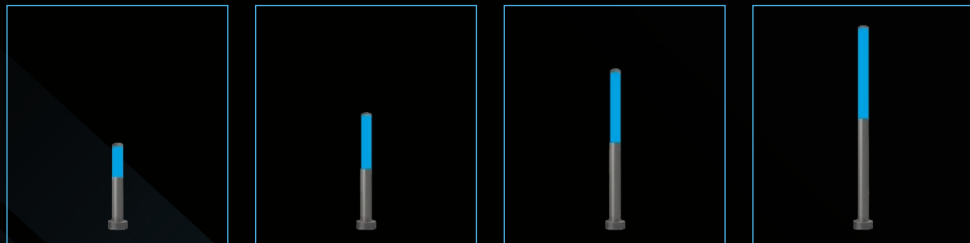

LIRA-8 44W RGBW Lumens: 4,048 Wattage: 44
 LIRA-8 66W RGBW Lumens: 6,072 Wattage: 66
 LIRA-8 88W RGBW Lumens: 8,096 Wattage: 88
 LIRA-8 110W RGBW Lumens: 10,120 Wattage: 110

FLOODS



ORX-F1 Lumens: 1,577 – 5,214 Wattage: 21 – 43
 ORX-F2 Lumens: 5,348 – 23,703 Wattage: 60 – 198
 ORX-F3 Lumens: 27,422 – 53,332 Wattage: 310 – 445
 ORX-F1 (VCS) Lumens: 1,577 – 5,214 Wattage: 21 – 43
 ORX-F2 (VCS) Lumens: 5,348 – 23,703 Wattage: 60 – 198
 ORX-F3 (VCS) Lumens: 27,422 – 53,332 Wattage: 310 – 445



NV-F1 Lumens: 2,160 – 6,030 Wattage: 20 – 45
 NV-F2 Lumens: 5,400 – 10,720 Wattage: 50 – 80
 NV-F3 Lumens: 9,125 – 26,275 Wattage: 60 – 205
 NV-F4 Lumens: 19,465 – 50,781 Wattage: 120 – 409
 NV-F5 Lumens: 51,797 – 103,699 Wattage: 575 – 805

FLOODS - STATIC COLOR



ORX-F1 Static Color Lumens: 1,577 – 5,214 Wattage: 21 – 43
 624–634nm (Red)
 520–540nm (Green)
 440–460nm (Royal Blue)
 585–600nm (PC Amber)
 ORX-F2 Static Color Lumens: 5,348 – 23,703 Wattage: 60 – 198
 624–634nm (Red)
 520–540nm (Green)
 440–460nm (Royal Blue)
 585–600nm (PC Amber)
 ORX-F3 Static Color Lumens: 27,422 – 53,332 Wattage: 310 – 445
 624–634nm (Red)
 520–540nm (Green)
 440–460nm (Royal Blue)
 585–600nm (PC Amber)
 NV-F1 Static Color Lumens: 2,160 – 6,030 Wattage: 20 – 45
 624–634nm (Red)
 520–540nm (Green)
 440–460nm (Royal Blue)
 585–600nm (PC Amber)
 NV-F2 Static Color Lumens: 5,400 – 10,720 Wattage: 50 – 80
 624–634nm (Red)
 520–540nm (Green)
 440–460nm (Royal Blue)
 585–600nm (PC Amber)
 NV-F3 Static Color Lumens: 9,125 – 26,275 Wattage: 60 – 205
 624–634nm (Red)
 520–540nm (Green)
 440–460nm (Royal Blue)
 585–600nm (PC Amber)



NV-F4 Static Color Lumens: 19,465 – 50,781 Wattage: 120 – 409
 624–634nm (Red)
 520–540nm (Green)
 440–460nm (Royal Blue)
 585–600nm (PC Amber)
 NV-F5 Static Color Lumens: 51,797 – 103,699 Wattage: 575 – 805
 624–634nm (Red)
 520–540nm (Green)
 440–460nm (Royal Blue)
 585–600nm (PC Amber)

GARAGE, CANOPY & CEILING



ORX-1-CM
Lumens: 1,955 – 5,214
Wattage: 22 – 43

ORX-2-CM (PM)
Lumens: 1,690 – 21,669
Wattage: 21 – 200

ORX-3-CM (PM)
Lumens: 7,895 – 53,029
Wattage: 88 – 452

AVSL-2F
Lumens: 2,043 – 5,425
Wattage: 20 – 50

AVSL-4F
Lumens: 3,967 – 9,445
Wattage: 21 – 50

VSR-S-CM
Lumens: 2,085 – 12,299
Wattage: 21 – 106



VSR-S-PM
Lumens: 2,085 – 12,299
Wattage: 21 – 106

VSR-1-CM
Lumens: 11,544 – 23,785
Wattage: 104 – 205

VSR-1-PM
Lumens: 11,544 – 23,785
Wattage: 104 – 205

VSS-S-CM
Lumens: 1,944 – 12,508
Wattage: 18 – 106

VSS-S-PM
Lumens: 1,944 – 12,508
Wattage: 18 – 106


VSS-1-CM
Lumens: 7,242 – 25,215
Wattage: 71 – 205



VSS-1-PM
Lumens: 7,242 – 25,215
Wattage: 71 – 205



WALL MOUNT - SCONCES & WALL PACKS

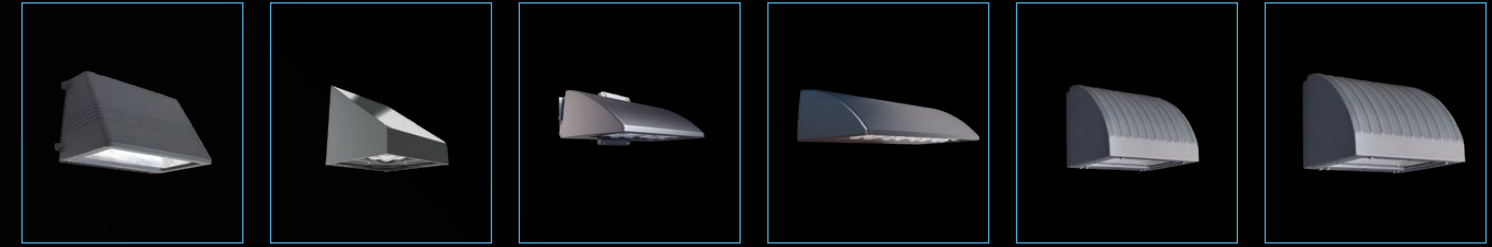

HERMOSA
Lumens: 1,764 – 14,698
Wattage: 22 – 68

TWA
Lumens: 1,206 – 6,359
Wattage: 10 – 56

NV-W
Lumens: 2,398 – 11,544
Wattage: 21 – 100

NV-W2
Lumens: 9,285 – 24,007
Wattage: 99 – 205

FLOW
Lumens: 1,484 – 6,390
Wattage: 21 – 71

FLOW 2
Lumens: 2,772 – 9,672
Wattage: 33 – 106



RHC
Lumens: 2,239 – 6,301
Wattage: 21 – 55

KLIP
Lumens: 1,032 – 3,238
Wattage: 10 – 53

TWL
Lumens: 1,206 – 6,359
Wattage: 10 – 56

WALL MOUNT - HIGH LUMENS



NV-1-WM
Lumens: 1,336 – 26,650
Wattage: 21 – 207

NV-2-WM
Lumens: 11,692 – 56,092
Wattage: 168 – 467

NV-3-WM
Lumens: 38,011 – 103,699
Wattage: 420 – 799

VUE-1-DWM
Lumens: 4,914 – 22,755
Wattage: 54 – 205

VUE-2-DWM
Lumens: 25,774 – 35,076
Wattage: 263 – 316

VUE-1-WM
Lumens: 4,914 – 22,755
Wattage: 54 – 205



VUE-2-WM
Lumens: 25,774 – 35,076
Wattage: 263 – 316


VSR-S-WM
Lumens: 2,070 – 12,296
Wattage: 18 – 106

VSR-1-WM
Lumens: 7,427 – 23,785
Wattage: 71 – 205

VSR-2-WM
Lumens: 26,585 – 36,665
Wattage: 263 – 316

VSS-S-WM
Lumens: 2,219 – 12,508
Wattage: 21 – 200

VSS-1-WM
Lumens: 7,242 – 25,215
Wattage: 71 – 205



VSS-2-WM
Lumens: 26,826 – 37,288
Wattage: 263 – 316

WALL MOUNT - ARCHITECTURAL & DECORATIVE



ORX-C
Lumens: 5,953 – 16,978
Wattage: 88 – 155



ORX-W
Lumens: 1,801 – 9,838
Wattage: 21 – 87



ORX-2-W
Lumens: 1,690 – 21,669
Wattage: 21 – 200



ORX-2-PTWM
Lumens: 1,690 – 21,400
Wattage: 21 – 200



BV-M-WM
Lumens: 1,728 – 5,992
Wattage: 18 – 56



BV-1-WM
Lumens: 3,168 – 11,128
Wattage: 33 – 104




CAB-AM-WM
Lumens: 1,836 – 6,608
Wattage: 18 – 56



CAB-W
Lumens: 1,836 – 6,608
Wattage: 18 – 56



CAL-S-WM
Lumens: 1,800 – 11,872
Wattage: 18 – 106



CAL-1-WM
Lumens: 5,151 – 23,575
Wattage: 51 – 205



CAL-2-WM
Lumens: 8,500 – 31,034
Wattage: 85 – 263



CAM-1-WM
Lumens: 1,598 – 10,816
Wattage: 17 – 104



CLA-M-WM
Lumens: 2,070 – 6,496
Wattage: 18 – 56



CLA-1-WM
Lumens: 2,070 – 9,088
Wattage: 18 – 71



DMR-1-WM
Lumens: 1,429 – 10,924
Wattage: 18 – 104



HRZ-MA-WM
Lumens: 2,070 – 26,240
Wattage: 18 – 205



HRZ-PT-WM
Lumens: 2,070 – 26,240
Wattage: 18 – 205



LEG-1-WM
Lumens: 1,890 – 12,036
Wattage: 18 – 102



NOVA-2-WM
Lumens: 1,728 – 27,801
Wattage: 18 – 247



NWP-1-WM
Lumens: 1,476 – 6,745
Wattage: 18 – 71



SVN-1-WM
Lumens: 1,598 – 11,024
Wattage: 17 – 104



SVN-2-WM
Lumens: 1,598 – 11,024
Wattage: 17 – 104



SY-1-WM
Lumens: 1,602 – 3,636
Wattage: 18 – 36



SY-2-WM
Lumens: 4,806 – 10,504
Wattage: 54 – 104



WIL-WM
Lumens: 1,746 – 8,640
Wattage: 18 – 80

WALL MOUNT - HIGH LUMENS



NV-F3-WM
Lumens: 9,125 – 26,275
Wattage: 60 – 205



NV-F4-WM
Lumens: 19,465 – 50,781
Wattage: 120 – 409

SCONCE



LIRA WALL SCONCE
Lumens: 2,863 – 12,147
Wattage: 22 – 88

LINEAR




AVSL-2F-WM
Lumens: 2,043 – 5,425
Wattage: 20 – 50



AVSL-4F-WM
Lumens: 3,967 – 9,445
Wattage: 20 – 50



SPORTS - TENNIS & PICKLEBALL

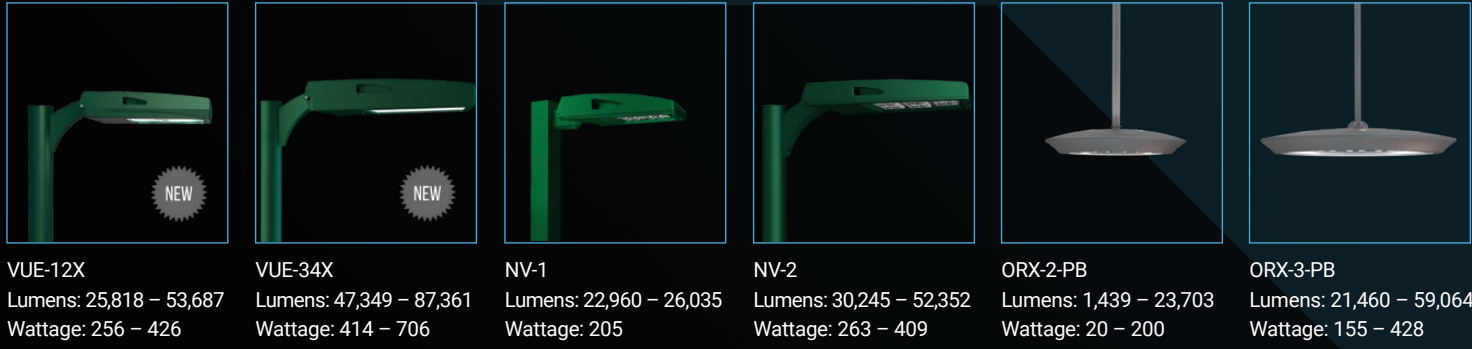

VUE-12X Lumens: 25,818 – 53,687 Wattage: 256 – 426	VUE-34X Lumens: 47,349 – 87,361 Wattage: 414 – 706	NV-1 Lumens: 22,960 – 26,035 Wattage: 205	NV-2 Lumens: 30,245 – 52,352 Wattage: 263 – 409	ORX-2-PB Lumens: 1,439 – 23,703 Wattage: 20 – 200	ORX-3-PB Lumens: 21,460 – 59,064 Wattage: 155 – 428
---	---	--	--	--	--


SPORTS - FIELD SPORTS (BASEBALL, FOOTBALL, SOCCER)



VUE-12X Lumens: 25,818 – 53,687 Wattage: 256 – 426	VUE-34X Lumens: 47,349 – 87,361 Wattage: 414 – 706	NV-F5-SP Lumens: 41,358 – 85,677 Wattage: 535 – 806
---	---	--



POLES & BASES

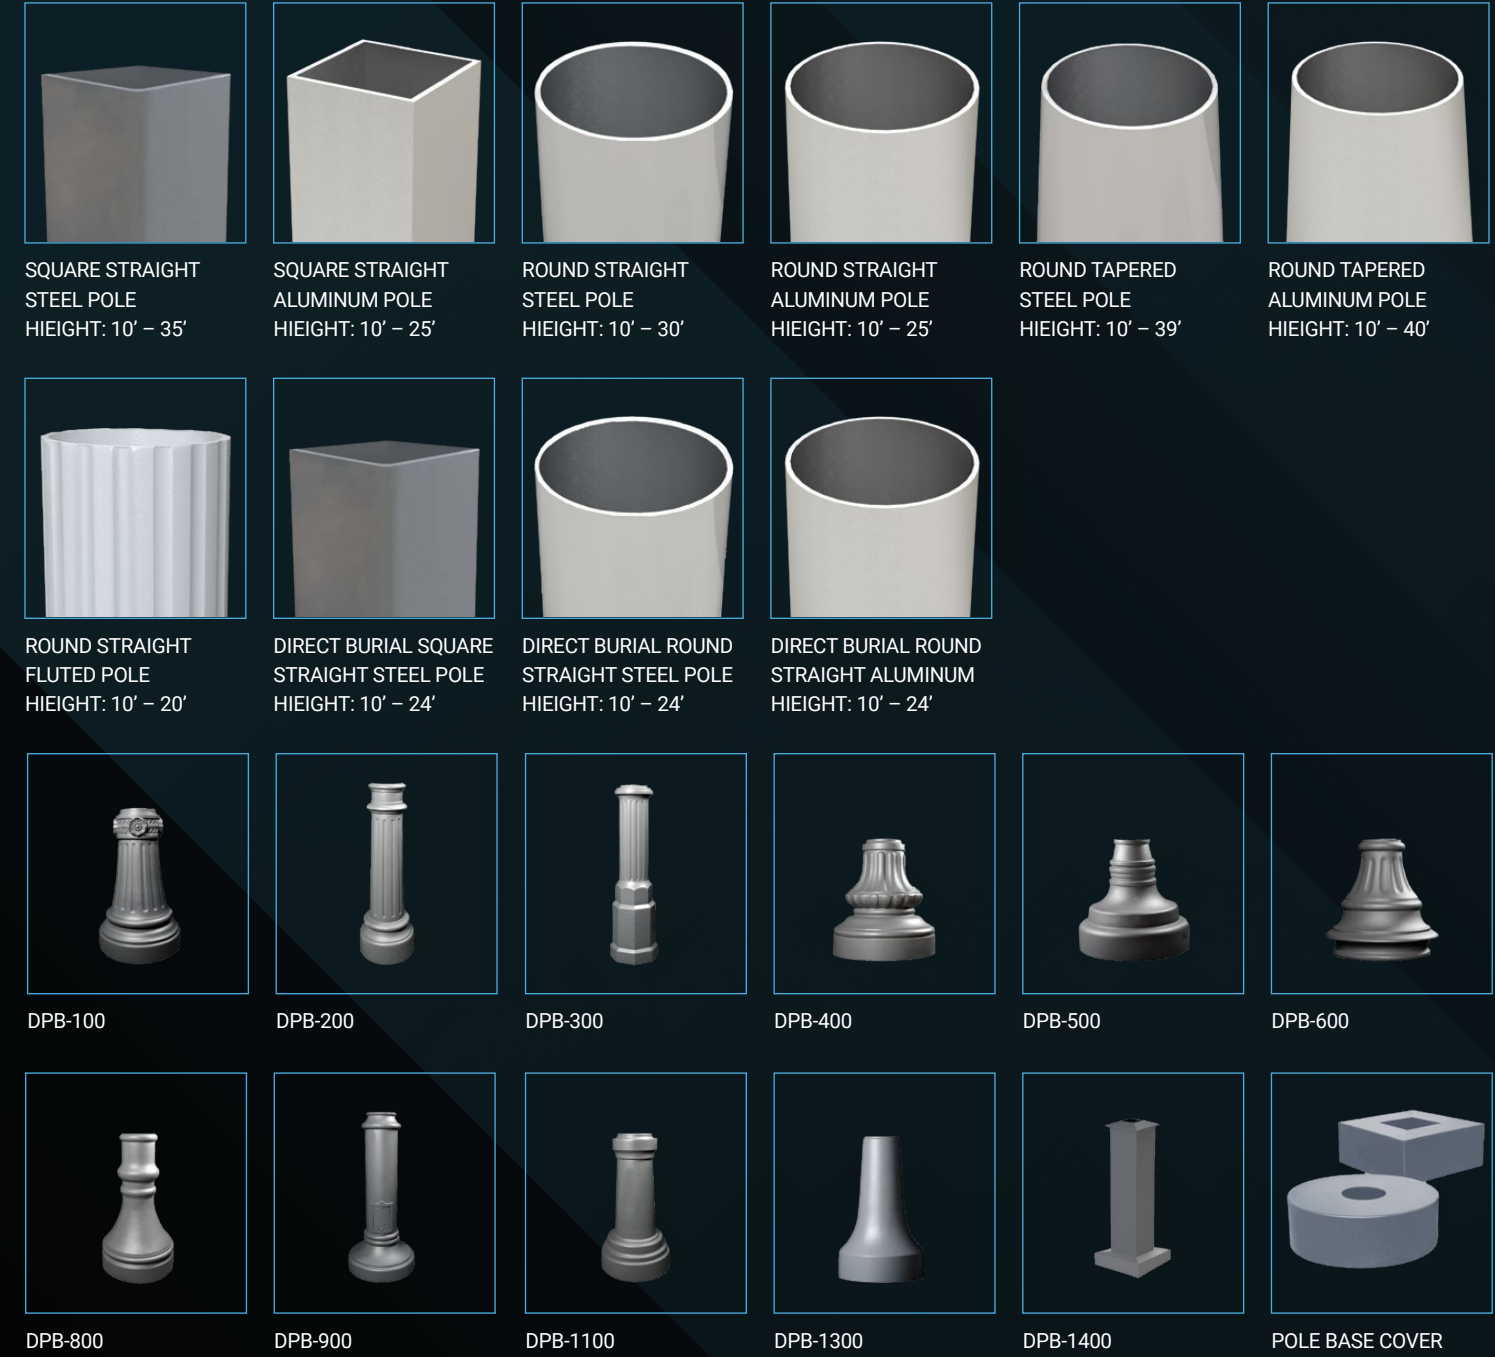


SQUARE STRAIGHT STEEL POLE HIEIGHT: 10' – 35'	SQUARE STRAIGHT ALUMINUM POLE HIEIGHT: 10' – 25'	ROUND STRAIGHT STEEL POLE HIEIGHT: 10' – 30'	ROUND STRAIGHT ALUMINUM POLE HIEIGHT: 10' – 25'	ROUND TAPERED STEEL POLE HIEIGHT: 10' – 39'	ROUND TAPERED ALUMINUM POLE HIEIGHT: 10' – 40'
ROUND STRAIGHT FLUTED POLE HIEIGHT: 10' – 20'	DIRECT BURIAL SQUARE STRAIGHT STEEL POLE HIEIGHT: 10' – 24'	DIRECT BURIAL ROUND STRAIGHT STEEL POLE HIEIGHT: 10' – 24'	DIRECT BURIAL ROUND STRAIGHT ALUMINUM HIEIGHT: 10' – 24'		
DPB-100	DPB-200	DPB-300	DPB-400	DPB-500	DPB-600
DPB-800	DPB-900	DPB-1100	DPB-1300	DPB-1400	POLE BASE COVER

CROSS ARMS



CROSS ARMS INLINE CROSS ARMS INLINE CROSS PENDENT ARMS SLIP FIT ARMS BULL HORN ARMS TENNIS COURT ARMS




DAVIT ARMS

DECORATIVE ARMS - POLE MOUNT



ACHITECTURAL ARM 1 ACHITECTURAL ARM 2 ACHITECTURAL ARM 3 ACHITECTURAL ARM 4 ACHITECTURAL ARM 5 ACHITECTURAL ARM 6

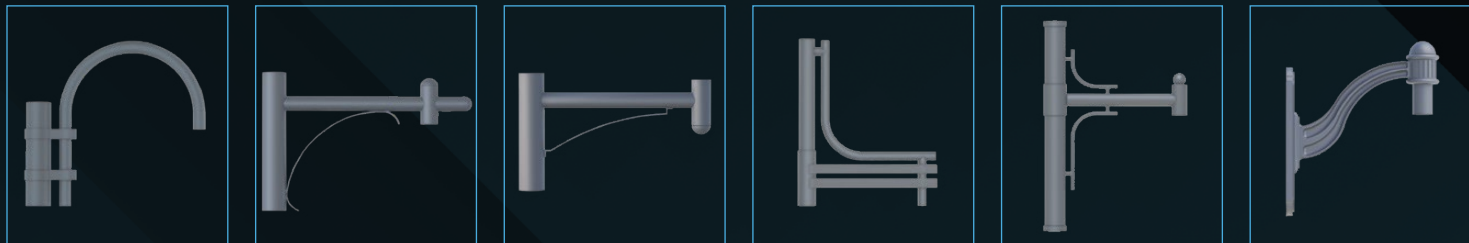

ACHITECTURAL ARM 7 ACHITECTURAL ARM 8 ACHITECTURAL ARM 9 ACHITECTURAL ARM 10 ACHITECTURAL ARM 11 ACHITECTURAL ARM 12




ACHITECTURAL ARM 13 ACHITECTURAL ARM 14 ACHITECTURAL ARM 15 ACHITECTURAL ARM 16 ACHITECTURAL ARM 17 ACHITECTURAL ARM 18


DECORATIVE ARMS - WALL MOUNT



ACHITECTURAL ARM 1 ACHITECTURAL ARM 2 ACHITECTURAL ARM 3 ACHITECTURAL ARM 4 ACHITECTURAL ARM 5 ACHITECTURAL ARM 6

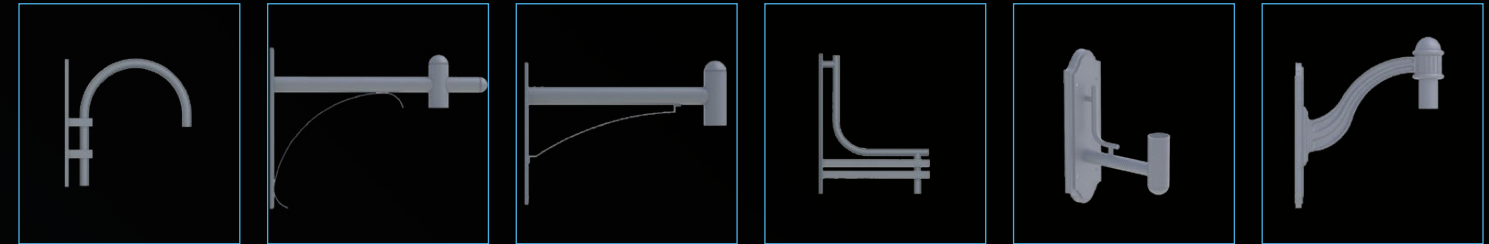


ACHITECTURAL ARM 7 ACHITECTURAL ARM 8 ACHITECTURAL ARM 9 ACHITECTURAL ARM 10 ACHITECTURAL ARM 11 ACHITECTURAL ARM 12

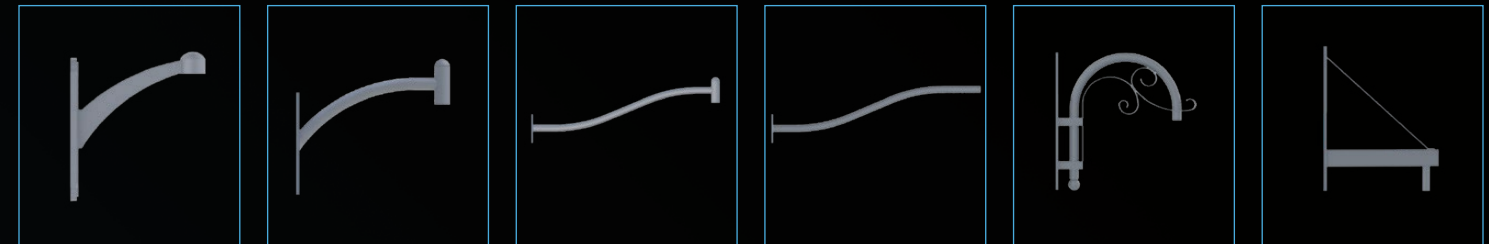


ACHITECTURAL ARM 13 ACHITECTURAL ARM 14 ACHITECTURAL ARM 15 ACHITECTURAL ARM 16 ACHITECTURAL ARM 17 ACHITECTURAL ARM 18

ACCESSORIES

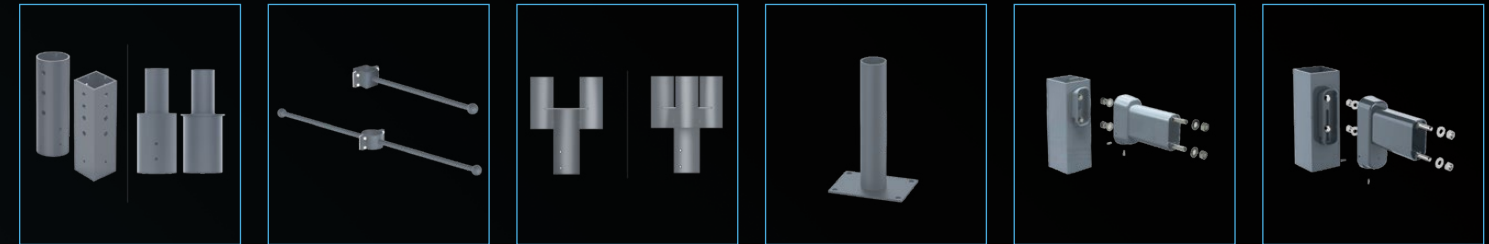

ADAPTORS BANNER ARMS DAVIT FITTER PIER MOUNT QMB RQMB



WALL MOUNT BRACKETS

QUICKSHIP FLASH



FLX-NV-1
Lumens: 7,739 – 26,650
Wattage: 71 – 205



FLX-NV-2
Lumens: 27,352 – 51,534
Wattage: 168 – 409



FLX-NV-W
Lumens: 2,470 – 9,646
Wattage: 19 – 71



FLX-NV-W2
Lumens: 7,890 – 24,007
Wattage: 66 – 205



FLX-NV-F1
Lumens: 2,200 – 6,030
Wattage: 20 – 45




FLX-NV-F2
Lumens: 6,600 – 10,720
Wattage: 60 – 80




FLX-SSSP

FINISHES



BRONZE TEXTURED



WHITE TEXTURED




SMOOTH WHITE GLOSS



SILVER METALIC




BLACK TEXTURED




SMOOTH BLACK GLOSS




GRAPHITE TEXTURED



GREY TEXTURED



GREEN TEXTURED



HUNTER GREEN TEXTURED







FIXTURES & POLES | BUY AMERICA(N) | QUICKSHIP FLASH



**AREA, SITE
& ROADWAY**



**ARCHITECTURAL
& DECORATIVE
POST TOP**



**BOLLARDS
& COLUMNS**



FLOODLIGHTS



WALL MOUNT



**GARAGE, CANOPY
& CEILING**



**TENNIS &
PICKLEBALL**



**POLES
& BASES**



ARMS



ACCESSORIES

nlsighting.com