

STA303A

查询STA303A供应信息

NPN Darlington

捷多邦, 专业PCB打样工厂, 24小时加急出货

General purpose/3-phase motor drive

External dimensions  STA300

Absolute maximum ratings

($T_a=25^\circ\text{C}$)


Symbol	Ratings	Unit
V_{CB0}	120	V
V_{CE0}	100	V
V_{EB0}	6	V
I_c	4	A
I_{CP}	8 (PW \leq 10ms, Du \leq 50%)	A
P_T	3 ($T_a=25^\circ\text{C}$)	W
	15 ($T_c=25^\circ\text{C}$)	
T_j	150	$^\circ\text{C}$
T_{stg}	-40 to +150	$^\circ\text{C}$

Electrical characteristics

($T_a=25^\circ\text{C}$)


Symbol	Specification			Unit	Conditions
	min	typ	max		
I_{cB0}			100	μA	$V_{CB}=120\text{V}$
I_{EB0}			10	mA	$V_{EB}=6\text{V}$
V_{CE0}	100			V	$I_c=10\text{mA}$
h_{FE}	1000				$V_{CE}=4\text{V}$, $I_c=2\text{A}$
$V_{CE(sat)}$			2.0	V	$I_c=2\text{A}$, $I_b=10\text{mA}$
t_{on}		0.8		μs	$V_{CC}\doteq 40\text{V}$,
t_{stg}		5.0		μs	$I_c=2\text{A}$,
t_f		2.0		μs	$I_{B1}=-I_{B2}=10\text{mA}$

Equivalent circuit diagram

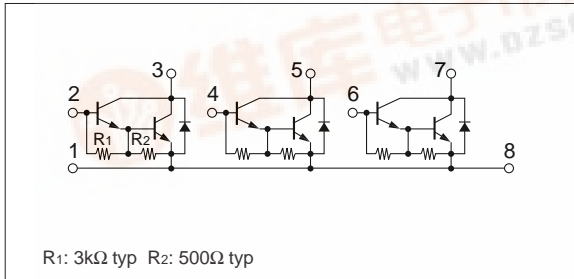


Characteristic curves


I_c - V_{CE} Characteristics (Typical)




h_{FE} - I_c Characteristics (Typical)




h_{FE} - I_c Temperature Characteristics (Typical)




$V_{CE(sat)}$ - I_c Temperature Characteristics (Typical)




$V_{CE(sat)}$ - I_b Characteristics (Typical)




I_c - V_{BE} Temperature Characteristics (Typical)



θ_{j-a} -PW Characteristics



P_T - T_a Characteristics



Safe Operating Area (SOA)

