



STV0190

DUAL 40 MSPS 6-BIT ANALOG TO DIGITAL CONVERTER

ADVANCE DATA

- RESOLUTION 6-BIT
- MAX. SAMPLING FREQUENCY : 40 MSPS
- TTL DATA OUTPUTS
- BUILT-IN SAMPLING AND HOLD CIRCUIT
- DUAL ADC ON CHIP TO IMPROVE CHANNEL MATCHING

APPLICATIONS

- QPSK DEMODULATION IN A SATELLITE DECODER

DESCRIPTION


The STV0190 is a dual 40 MSPS 6-bit Analog to Digital converter.

It is dedicated to QPSK demodulation in Satellite receiver.

The Flash architecture combined with interpolation technic gives the best trade off between power consumption and maximum conversion speed.



PIN CONNECTIONS

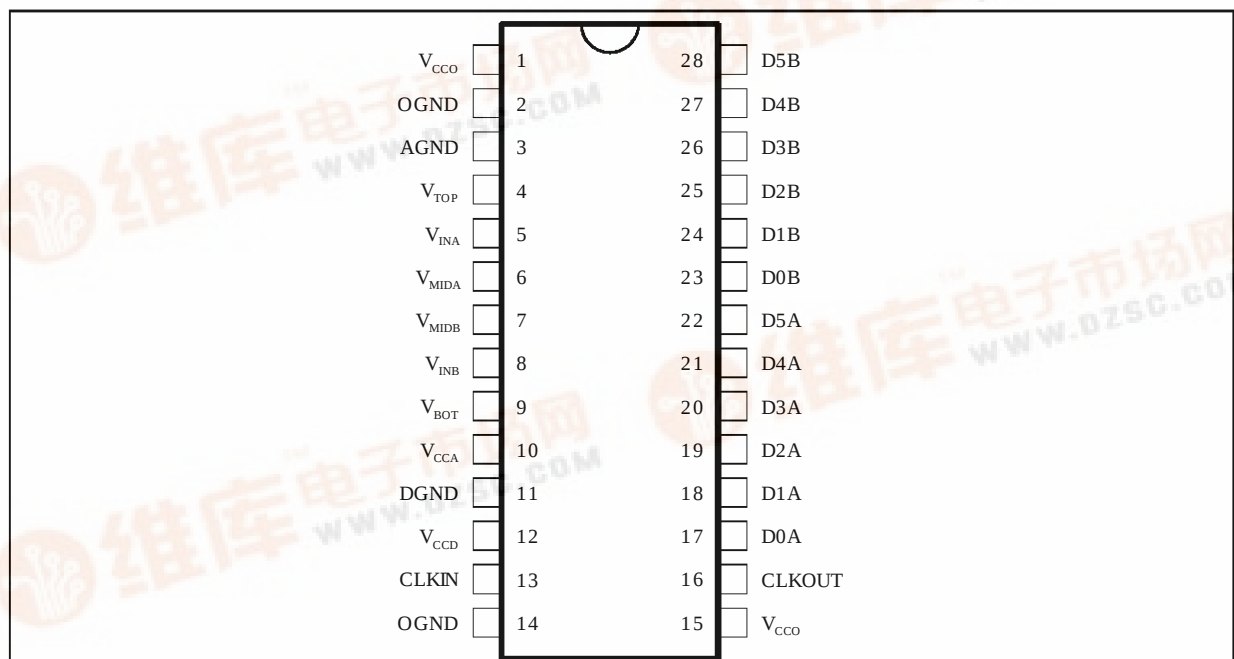

0190-01.EPS

May 1996

1/7

This is advance information on a new product now in development or undergoing evaluation. Details are subject to change without notice.




PIN CONFIGURATION

Pin N°	Symbol	Function
1	V _{CCO}	Output Buffer Supply Voltage Channel A + B
2	OGND	Output Buffer Ground Channel A + B
3	AGND	Analog Ground
4	V _{TOP}	Top Reference Voltage
5	V _{INA}	Analog Input Channel A
6	V _{MIDA}	Reference Voltage DC Coupling Channel A
7	V _{MIDB}	Reference Voltage DC Coupling Channel B
8	V _{INB}	Analog Input Channel B
9	V _{BOT}	Bottom Reference Voltage
10	V _{CCA}	Analog Supply Voltage
11	DGND	Digital Ground
12	V _{CCD}	Digital Supply Voltage
13	CLKIN	Clock Input
14	OGND	Output Buffer Ground Channel A + B
15	V _{CCO}	Output Buffer Supply Voltage Channel A + B
16	CLKOUT	Clock Output
17 to 22	D0A to D5A	D0 (LSB) to D5 (MSB) Outputs Channel A
23 to 28	D0B to D5B	D0 (LSB) to D5 (MSB) Outputs Channel B

0190-01.TBL

BLOCK DIAGRAM

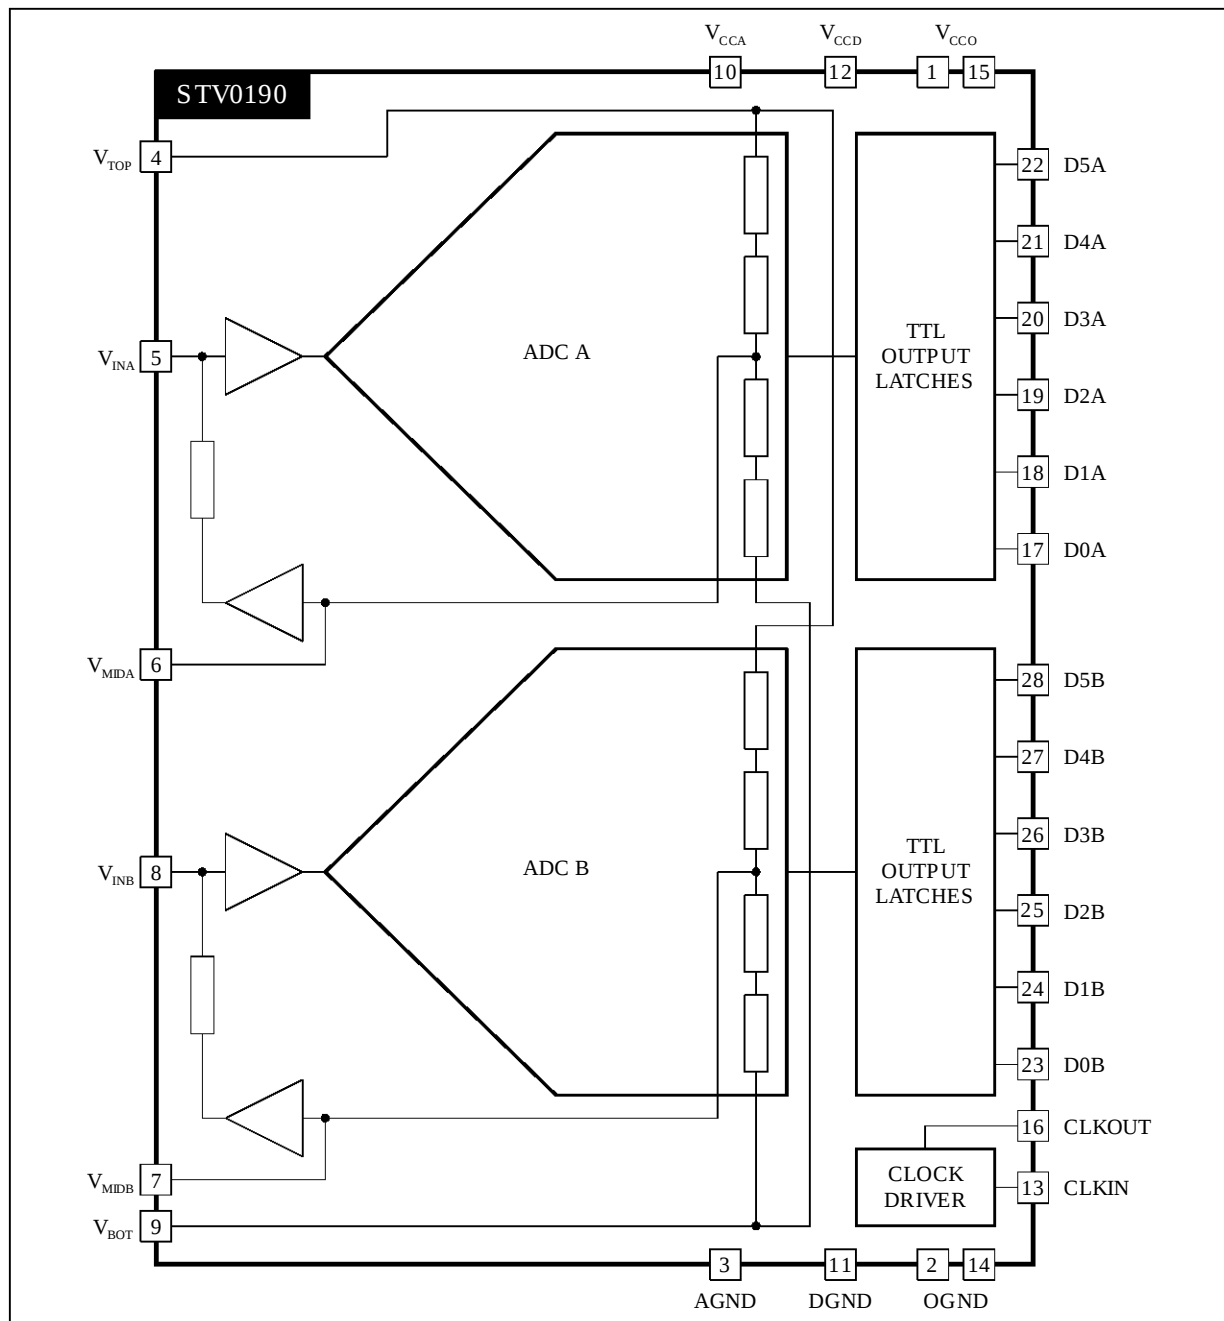

0190-02.EPS

STV0190

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
	Analog Supply Voltage	3.1, 3.45	V
	Digital Supply Voltage	3.1, 3.45	V
T _{oper}	Operating Temperature	0, +70	°C

0190-02.TBL

ELECTRICAL CHARACTERISTICS (V_{CC} = 3.3V, T_{amb} = 0 to 70°C, Full scale 10MHz, 1.5V_{PP} input, 40MSPS, C_L = 20pF, unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
--------	-----------	-----------------	------	------	------	------

ANALOG INPUT

	Differential Reference Voltage	V _{TOP} - V _{BOT}	1	1.5		V _{PP}
	Variation of Channel A to Channel B (FS)	0.5 LSB			8	mV
R _{IN}	Input Resistance		20			kΩ
	Input Bandwidth 3dB		20			MHz

DIGITAL OUTPUTS

	High Logic Voltage		2.4		V _{CC}	V
	Low Logic Voltage		0		0.4	V
	High Logic Current		-4			mA
	Low Logic Current				4	mA
	Logic Format	Analog Input		Digital Output		
		most positive input		63	111111	
				62	111110	
						
				33	100001	
				32	100000	
				31	011111	
				30	011110	
						
				1	000001	
		least positive input		0	000000	
t _{PD}	Output Timing	See Figure 1			9	ns
t _v	Output Timing	See Figure 1	5			ns
t _{SKEW}	Data Output Skew TSK (all outputs, settled within 20%)	See Figure 1			1	ns
t _{APER}	Aperture Delay relative to Data Clock	See Figure 1			1	ns
t _R , t _F	Data Output Rise and Fall Time				4	ns

CLOCK INPUT

V _{IH}	High Input Voltage		2.0		V _{CC}	V
V _{IL}	Low Input Voltage		0		0.8	V
I _{IH}	High Input Current				TBD	μA
I _{IL}	Low Input Current		TBD			μA
	Clock Duty Cycle		40		60	%
t _{CL}	Clock Period	See Figure 1	24			ns

0190-03.TBL

ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
CLOCK OUTPUT						
V_{OH}	High Output Voltage		2.4		V_{CC}	V
V_{OL}	Low Output Voltage		0		0.4	V
I_{OH}	High Output Current		-4			mA
I_{OL}	Low Output Current				4	mA
	Clock Duty Cycle		40		60	%
t_{CL}	Clock Period		24			ns

REFERENCE LADDER

	Top Voltage				$V_{CC} - 0.5$	V
	Bottom Voltage		$V_{CC} + 0.5$			V
	DC Bias Restoration Error	Open input digital output should be	32/64 011111		33/64 100000	
ZV_{TOP}/V_{BOT}	Input Impedance		90			Ω

CROSSTALK

	Isolation A/B		37			dB
--	---------------	--	----	--	--	----


DC ACCURACY

	Integral non Lin.		-0.5		+0.5	LSB
	Diff. Non Lin.		-0.5		+0.5	LSB

AC ACCURACY ($f_{IN} = 10\text{MHz}$, $FS = 40\text{ MSPS}$, $V_{IN} = 95\% \text{ FSCALE}$)

	Effective Number of Bit		5			bits
SNR			33			dB
THD	THD First 5 Harmony		33			dB
	Integral non Lin.		-1		+1	LSB
	A/D Amplifier Response Mismatching				0.2	dB


0190-04.TBL

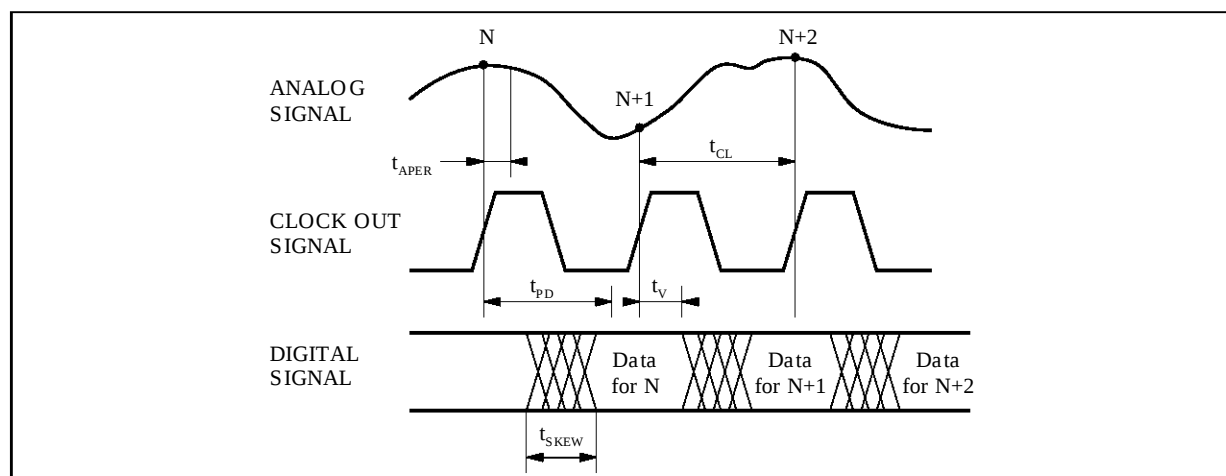Figure 1 : Timing Diagram

0190-03.EPS

Note : This diagram shows a delay of one clock cycle. Additional integer multiple delay periods are acceptable. Output data must be valid on the rising edge of the clock out signal.


TYPICAL APPLICATION

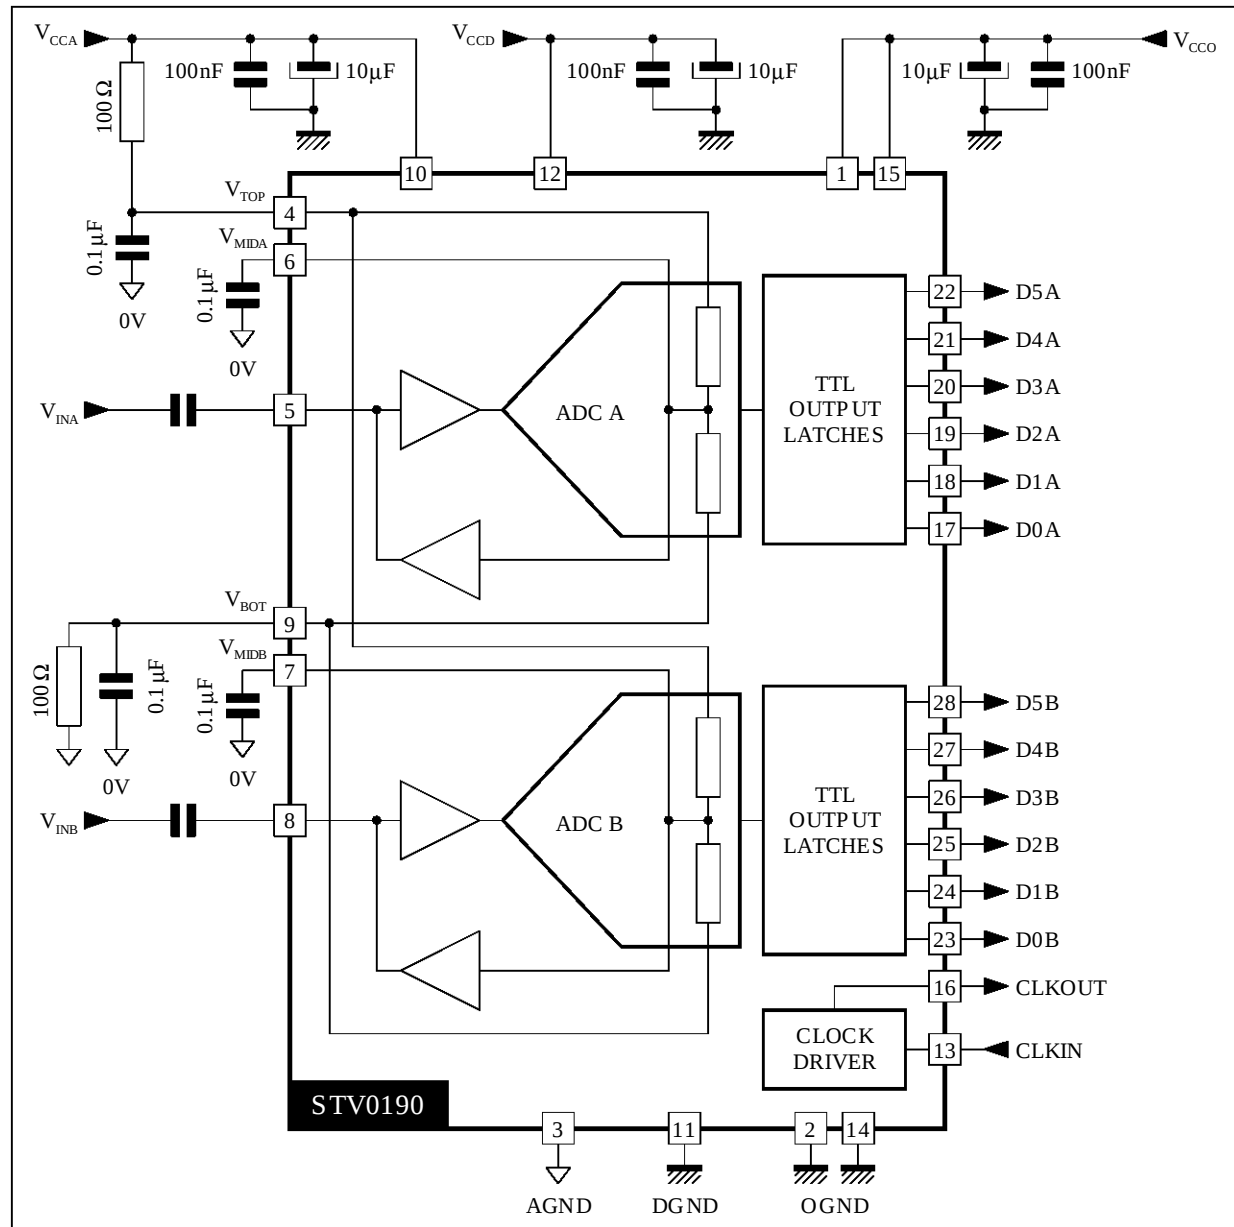

0190-04.EPS

PACKAGE MECHANICAL DATA

28 PINS - PLASTIC MICROPACKAGE (SO)

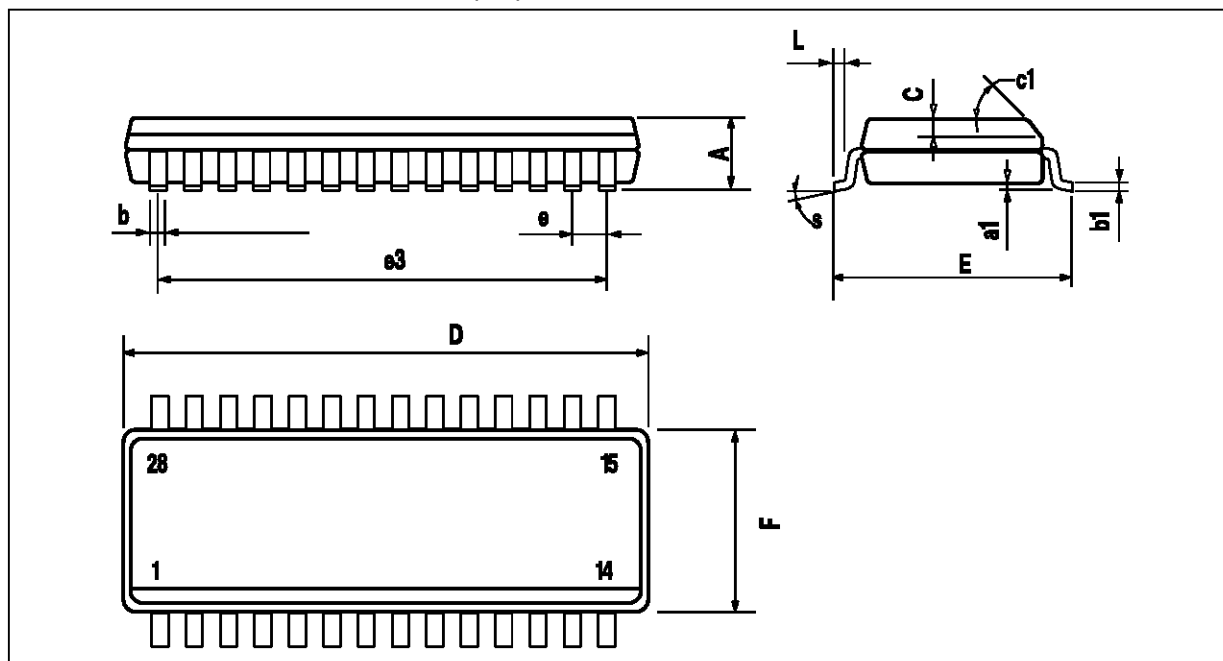

PM-SO28.EPS

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			2.65			0.104
a1	0.1		0.3	0.004		0.012
b	0.35		0.49	0.014		0.019
b1	0.23		0.32	0.009		0.013
C		0.5			0.020	
c1	45° (Typ.)					
D	17.7		18.1	0.697		0.713
E	10		10.65	0.394		0.419
e		1.27			0.050	
e3		16.51			0.65	
F	7.4		7.6	0.291		0.299
L	0.4		1.27	0.016		0.050
S	8° (Max.)					

SO28TBL

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No licence is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1996 SGS-THOMSON Microelectronics - All Rights Reserved

Purchase of I^2C Components of SGS-THOMSON Microelectronics, conveys a license under the Philips I^2C Patent. Rights to use these components in a I^2C system, is granted provided that the system conforms to the I^2C Standard Specifications as defined by Philips.

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.