
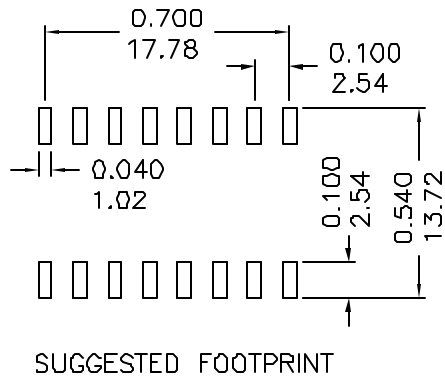
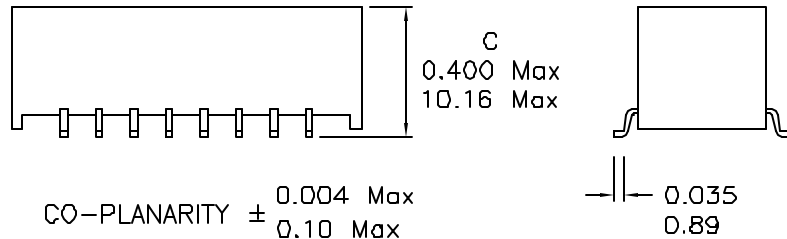



1. Dimensions:

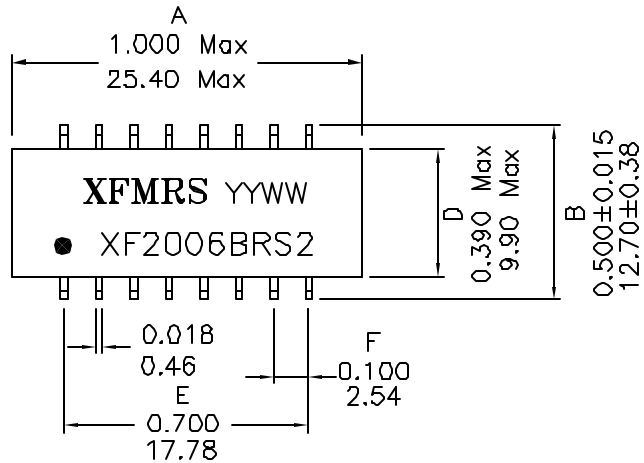

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from 0°C to +70°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

2. Schematic:

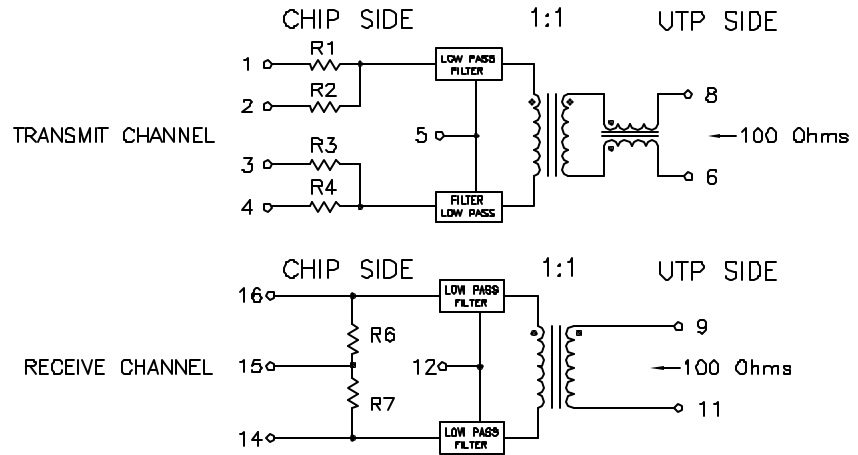

R1,R3: 390.0 Ohms R2,R4: 63.4 Ohms R6,R7: 49.9 Ohms

3. Electrical Specifications: @25°C

- HIPOT: 1500VAC Min
- Insertion Loss (1-10MHz): -5.0dB Max
- Return Loss (5-10MHz): -18dB Min 100 Ohms
-15dB Min 98 ±13 Ohms
- Attenuation (XMIT): 30MHz -30dB Min
40MHz -35dB Min, 100MHz -40dB Min
- Common Mode Rejection(XMIT): 5MHz -35dB Min
10MHz -30dB Min
50MHz -55dB Min
100MHz -50dB Min.

XFMRS Inc	Title: 10BASE-T FILTER	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Inch Dimensions in Inch/mm	P/N: XF2006BRS2 REV. A
	DWN.	廖玉坤 Sep-20-01
	CHK.	李清儿 Sep-20-01
	APP.	Isaiah M Sep-20-01

DOC REV A/2